

CEILING LOUDSPEAKERS

PC Plastic Ceiling Loudspeakers


ABS plastic ceiling loudspeakers with built-in 100V transformer.

PC 5TX & PC 8TX


Like the PC 5T and PC 8T in construction and facilities, these units differ only in as much as they are designed primarily for high quality background music provision.




PC 5TX

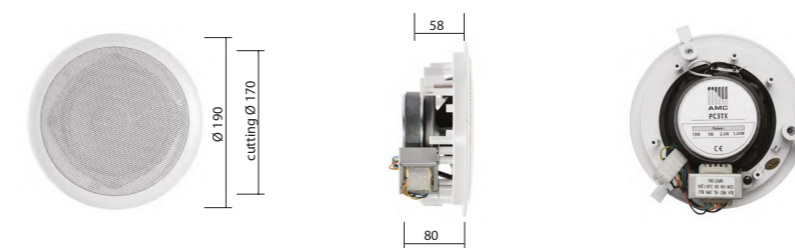


HORIZONTAL / VERTICAL POLAR DIAGRAMS

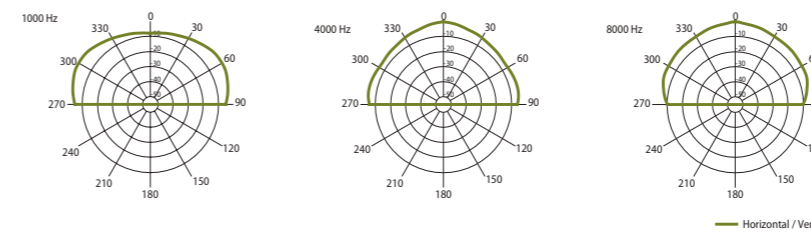


FREQUENCY RESPONSE

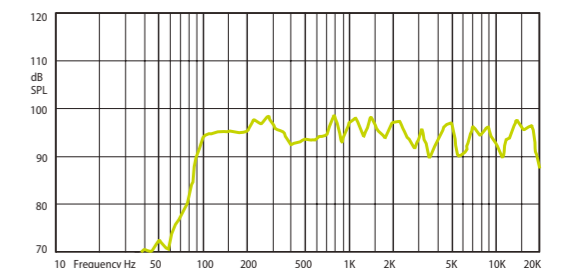


IMPEDANCE

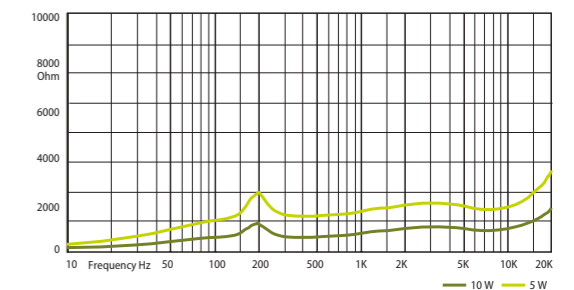


PC 8TX

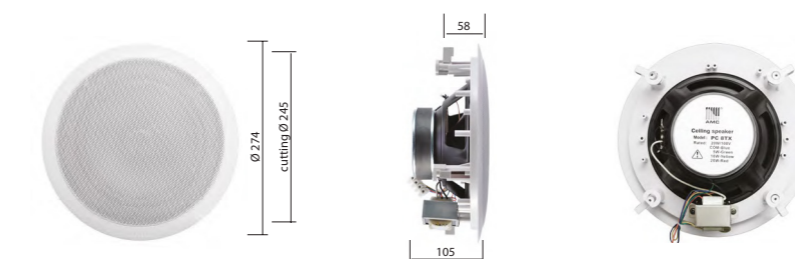


HORIZONTAL / VERTICAL POLAR DIAGRAMS

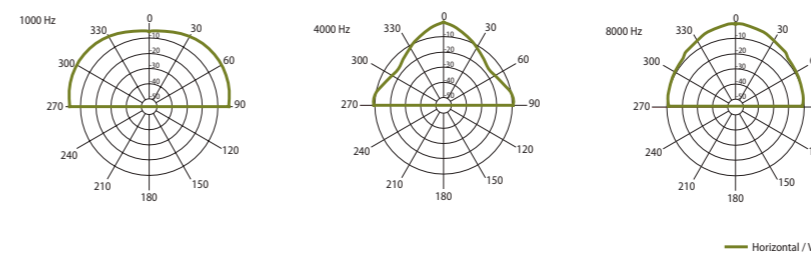

FREQUENCY RESPONSE

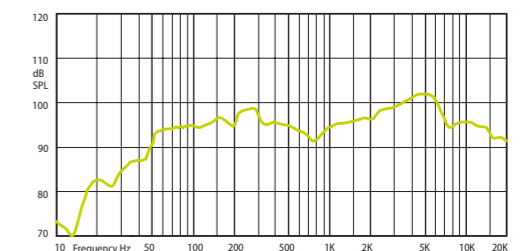

IMPEDANCE

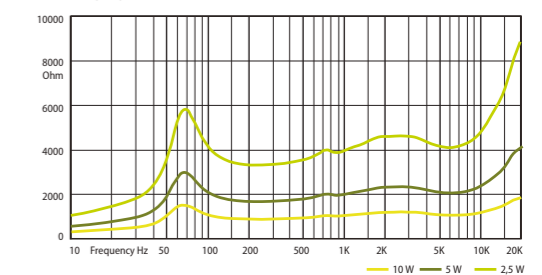

Technical Specifications	PC 5TX	PC 8TX
Rated power	10 W	20 W
Transformer power taps	10 W - 5 W - 2,5 W - 1,25 W	20 W - 10 W - 5 W - 2,5 W
Sensitivity	88 dB (1 W/1 m)	89 dB (1 W/1 m)
Maximum SPL	98 dB (Pmax/1 m) at 884 Hz	102 dB (Pmax/1 m) at 5415 Hz
Frequency response	100 Hz – 20 kHz	60 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial	8" (200 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 190 mm × 80 mm	ø 274 mm × 105 mm
Weight	1,1 kg	2,1 kg
Material	Plastic, Steel grill	Plastic, Steel grill
Colour	White (RAL 9016)	White (RAL 9016)