

## SUBWOOFERS

# SUB Powered Subwoofers



SUB powered subwoofers for extra low frequency sound reproduction.

# SUB 2

200W active subwoofer with front mounted high quality 10" glass aramid composite woofer.  
Strong bass output with 90 dB sensitivity. Small size and strong bass output will complement  
any installation where extra low frequencies are required.



HORIZONTAL / VERTICAL POLAR DIAGRAMS

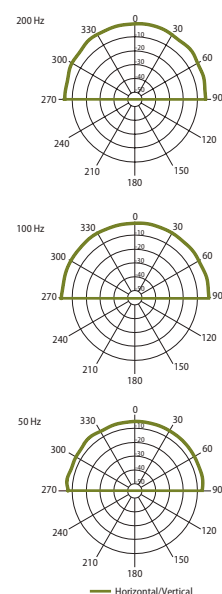

Technical Specifications	SUB 2
Rated power	200 W
Frequency response	20 Hz - 130 Hz
Low pass filter	50 Hz - 130 Hz
Maximum SPL	120 dB
Dispersion at 100 Hz	180° conical
Driver dimensions	10" (254mm) woofer
Input gain control	- 6 dBu - +3 dBu
Inputs	Stereo RCA, balanced stereo 6,3 mm TRS JACK, balanced stereo XLR
Dimensions	355 mm x 380 mm x 370 mm
Weight	12 kg
Material	Painted MDF
Colour	Black (RAL 9017)

FREQUENCY RESPONSE

