

AT2035

Large diaphragm side-address microphone

AT2035 key selling points


- **Large diaphragm**
Offer smooth, natural sound and low noise
- **High SPL handling and wide dynamic range**
Provide unmatched versatility
- **Custom shock mount**
Provides superior isolation
- **Switchable 80 Hz high-pass filter and 10 dB pad**
- **Cardioid polar pattern**
Reduces pickup of sounds from the sides and rear, improving isolation of desired sound source

AT2035 SPECIFICATIONS

Element	Fixed-charge back plate permanently polarized condenser
Polar pattern	Cardioid
Frequency response	20-20,000 Hz
Low frequency roll off	80 Hz, 12 dB/octave
Open circuit sensitivity	-32 dB (25.1 mV) re 1V at 1 Pa*
Impedance	120 ohms
Maximum input sound level	148 dB SPL, 1 kHz at 1% T.H.D.; 158 dB SPL, with 10 dB pad
Noise	12 dB SPL
Dynamic Range (typical)	136 dB, 1 kHz at Max SPL
Signal-to-noise ratio	82 dB, 1 kHz at 1 Pa*
Phantom power requirements	11-52V DC, 3.8 mA typical
Switches	Flat, roll-off; 10 dB pad (nominal)
Weight	403 g (14.2 oz)
Dimensions	170.0 mm (6.69") long, 52.0 mm (2.05") maximum body Ø
Output connector	Integral 3-pin XLRM-type
Accessories furnished	AT8458 shock mount for 5/8"-27 threaded stands; 5/8"-27 to 3/8"-16 threaded adapter; soft protective pouch

Pricing comparison

	RRP ex VAT	Street Europe (incl.20% VAT)
Audio-Technica		
AT2035	149,00 €	149,00 €
Rode		
NT1-A	175,00 €	169,00 €
AKG		
Perception 220	220,00 €	190,00 €

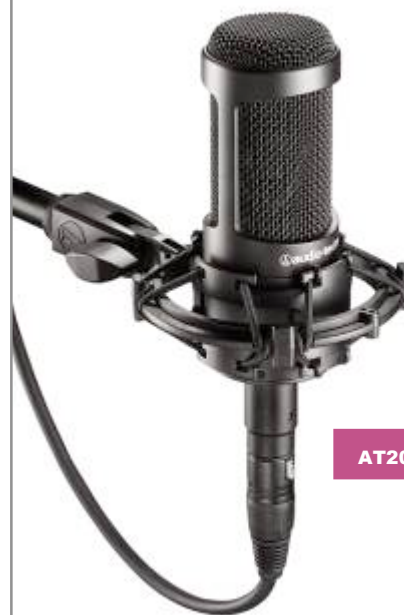

 **audio-technica.**
always listening

Audio-Technica Ltd, Technica House
Royal London Industrial Estate,
Leeds, LS11 8AG, UK
www.audio-technica.com
© 2008 Audio-Technica Ltd