

SPECIFICATION DATA

T2800


863 MHz FM Base Station Transmitter - Europe

Designed for use in Europe*, this Base Station transmitter is compatible with Williams Sound R2863 Receivers.




^{*}This system cannot be used in all countries. Check your government radio regulations for 863 MHz operation.

T2800 Rear View

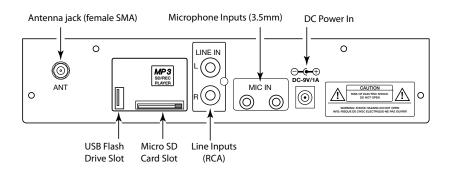

T2800 Front View

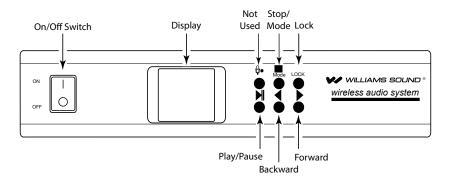

863 MHz FM Base Station Transmitter

T2800 Specifications

Dimensions:	21.1 cm W x 11.7 cm H x 16.5 cm D (8.3" x 1.8" x 6.5") (Depth includes power cord and antenna)
Shipping Weight:	1.36 kg (3 lbs)
Color:	Black with white legends
Power:	AC: 100 to 240 VAC, 50-60 Hz
	DC: 9 VDC, 80 mA current consumption
Power Switch:	Rocker, front panel
Temperature Range:	Operating: 0 C to 40 C (+32 F to 104 F) Storage: -20 C to 70 C (-4 F to +158 F)
Frequency Range:	863 - 865 MHz
Compatible Receiver:	R2863
Channel Frequencies:	Selectable, 16 channels, 863 – 865 MHz: Ch. 1 863.075
Non-interfering group channels:	1, 4, 8, 11, 16. Can be used simultaneously for up to 5 groups.
Frequency Response:	20 Hz - 16 kHz
Signal-to-Noise Ratio:	80 dB
Display:	Large, Red: Lock symbol, TX CH: 0-100 Large, Blue: Vol: 1-36, Rec: 1-23 Small, Blue: Mode: Microphone Input / Line Input / MP3 Player, Cycle: All Cycle / Random Play / Single Play / Single Cycle
Menu Push Buttons:	Mic/Record (not used), Mode/Stop, Lock, Play/Pause, Back (<), Forward (>)
Line Input:	Two RCA jacks; L and R, summed internally to mono
Microphone Input:	Two 3.5 mm jacks, summed internally to mono
Antenna Connector:	Female SMA
Warranty:	2 Years
•	1

Domestic Sales

Williams AV 10300 Valley View Rd Eden Prairie, MN 55344 Ph: 800-328-6190 / 952-943-2252

FAX: 952-943-2174 Email: info@williamsav.com Web: www.williamsav.com

International Sales

International Sales Department Williams AV 10300 Valley View Rd Eden Prairie, MN 55344 USA Phone: +1 952 943 2252 Fax: +1 952 943 2174

Fax: +1 952 943 2174
Email: info@williamsav.com
Web: www.williamsav.com

